

Operating instructions



Made in Germany
www.burg-waechter.de

SecuTronic





Contents

Additional information on the enclosed data carrier !

The system switches off after about 30 sec. without key depression.

Open / Close	Change language	Change code	Change time / date	Administer users	Administrator	Processes	Info	Battery replacement	Technical data
2	2	3	4	5-7	8	9	10	10	11







Open / Close



Selection keys




Delete key for wrong entry

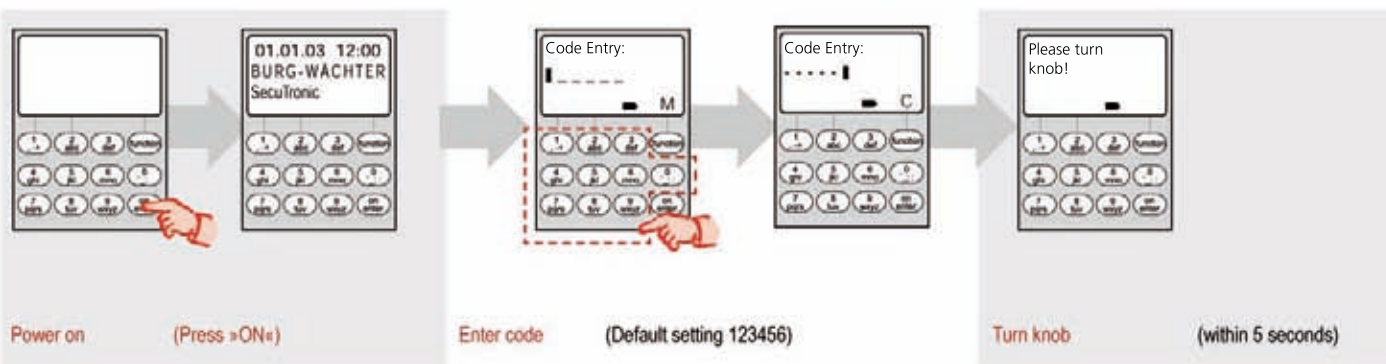

Change language


Not all languages listed are available. (Select preferred language.)

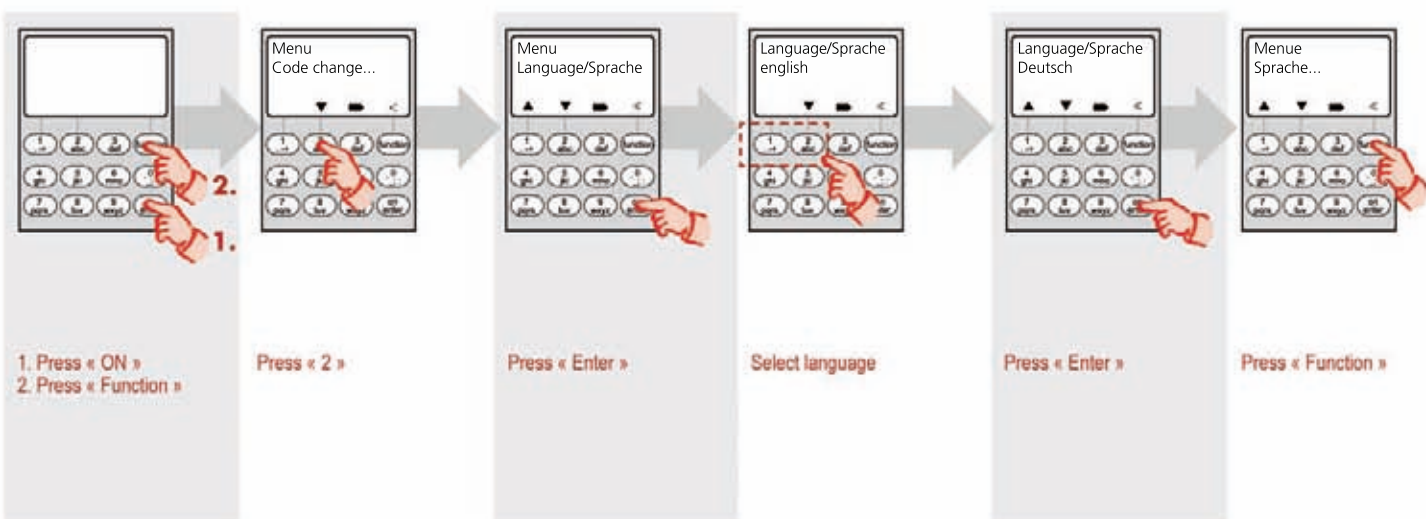

Change code

Enter code changes only with door open !


Do not enter personal data (e.g. birth date, telephone no.)

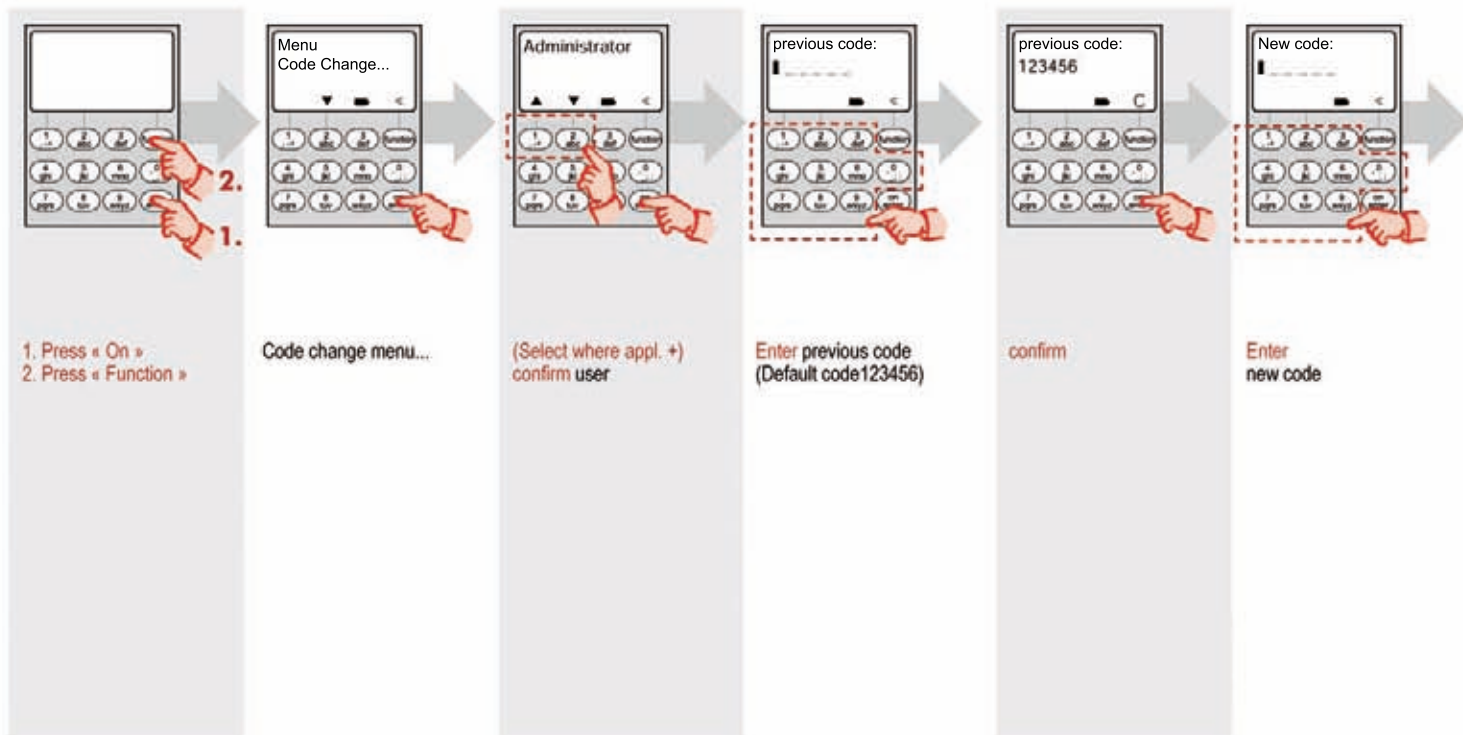

Change code


Positively note down new code !

Verify code repeatedly with door open !

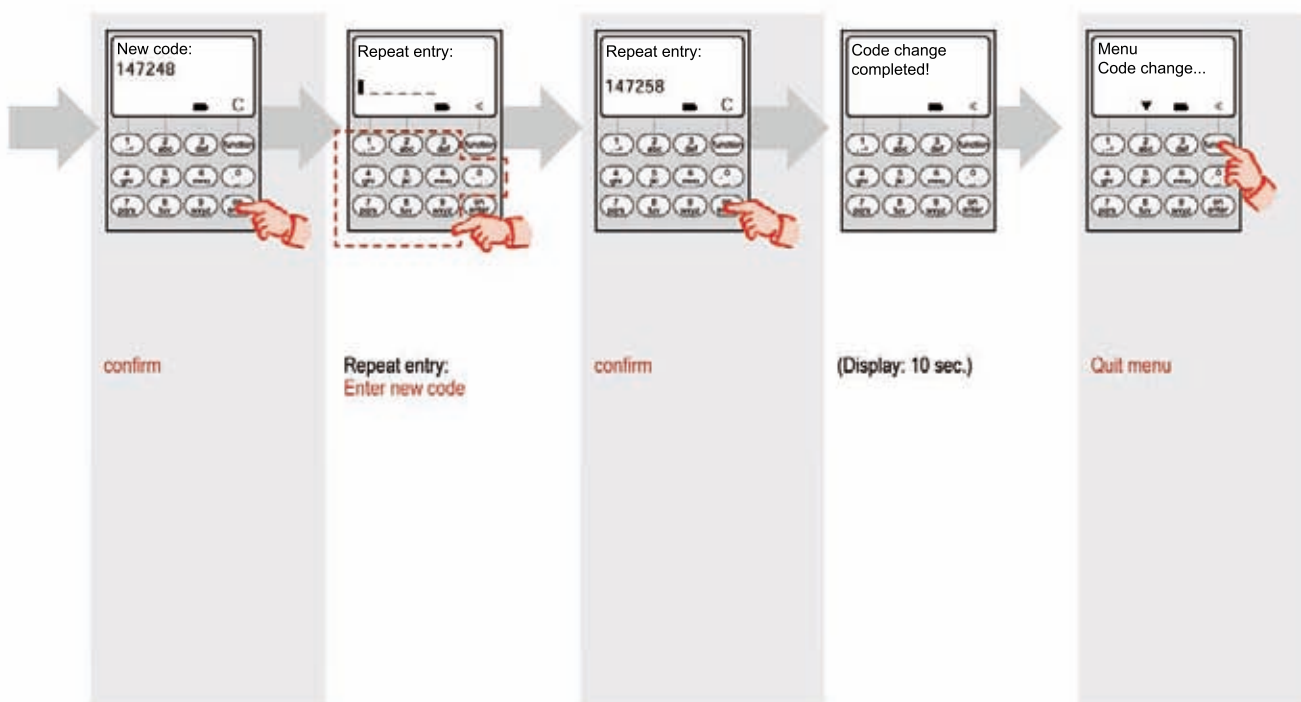


Admin. Code = administrator code

Change time

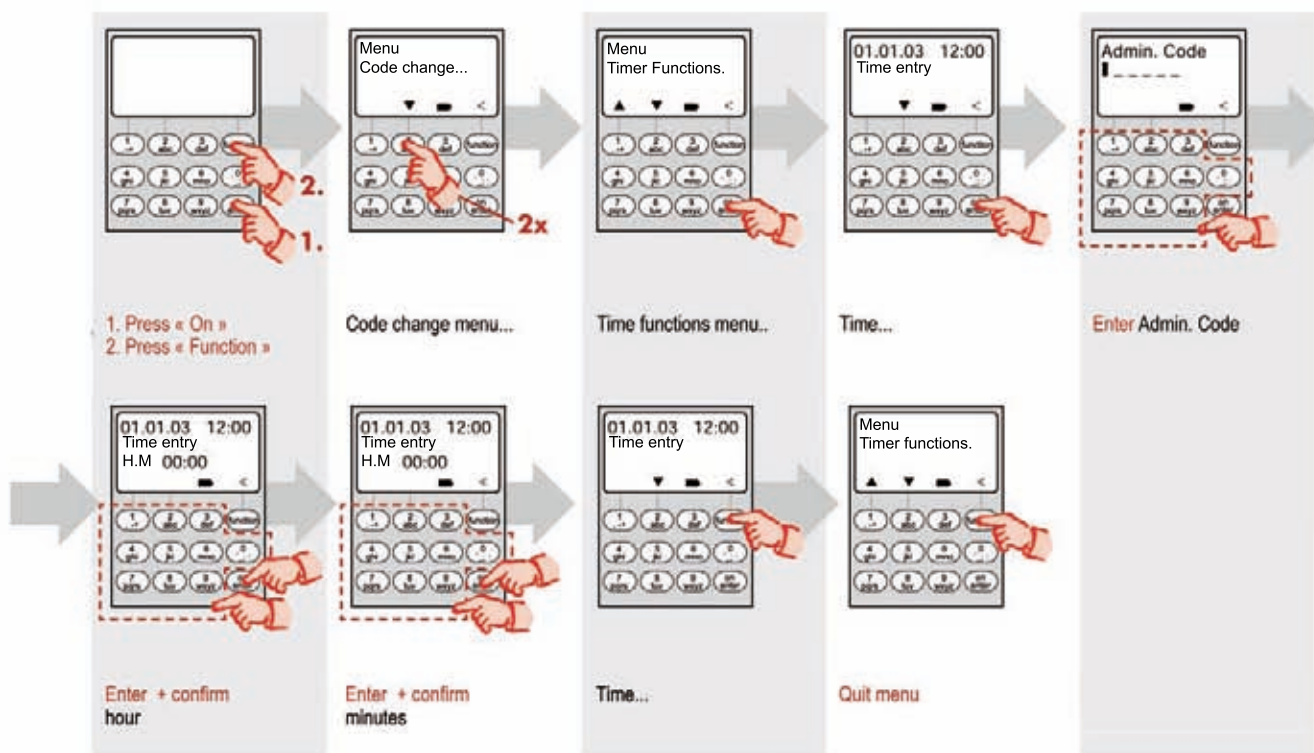

Change date

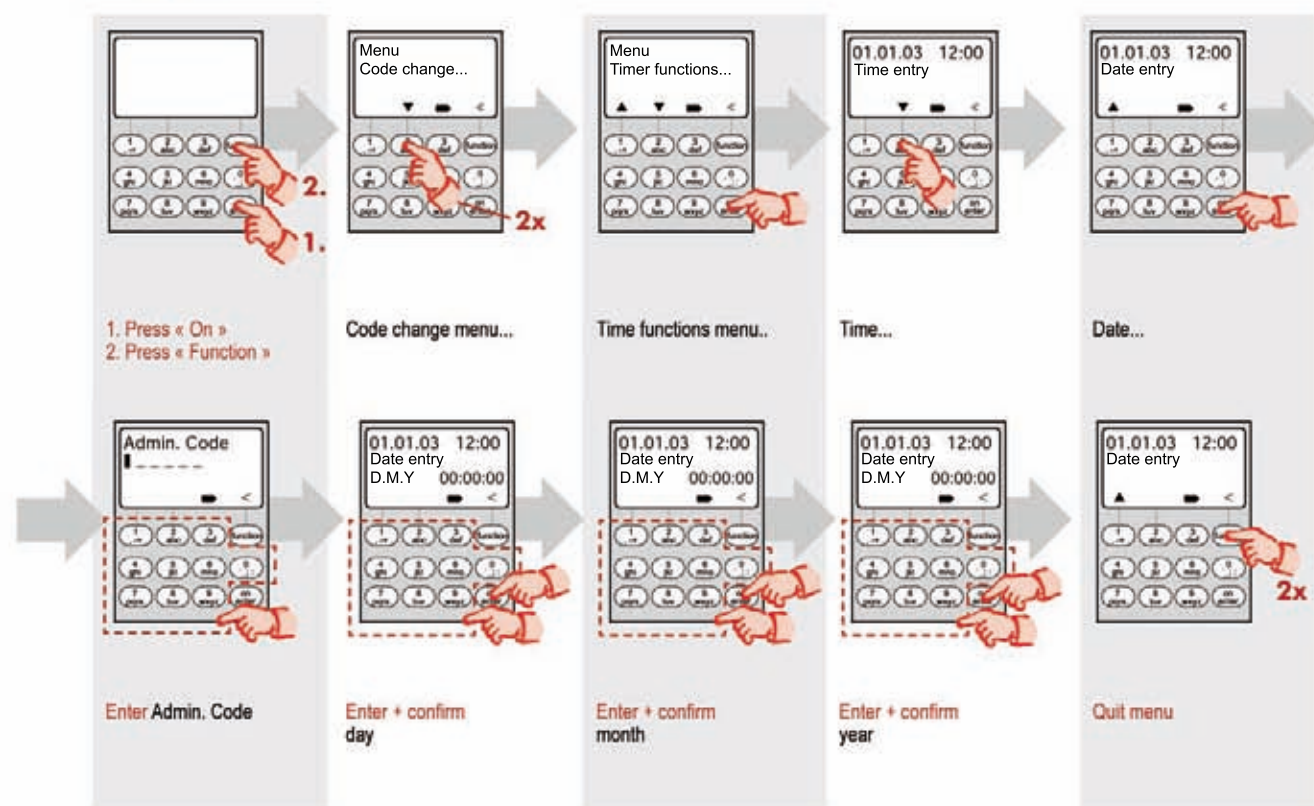



User: create, modify, display, delete



Access level:


0: Access denied

1: Access level
ADM: Access and programming right

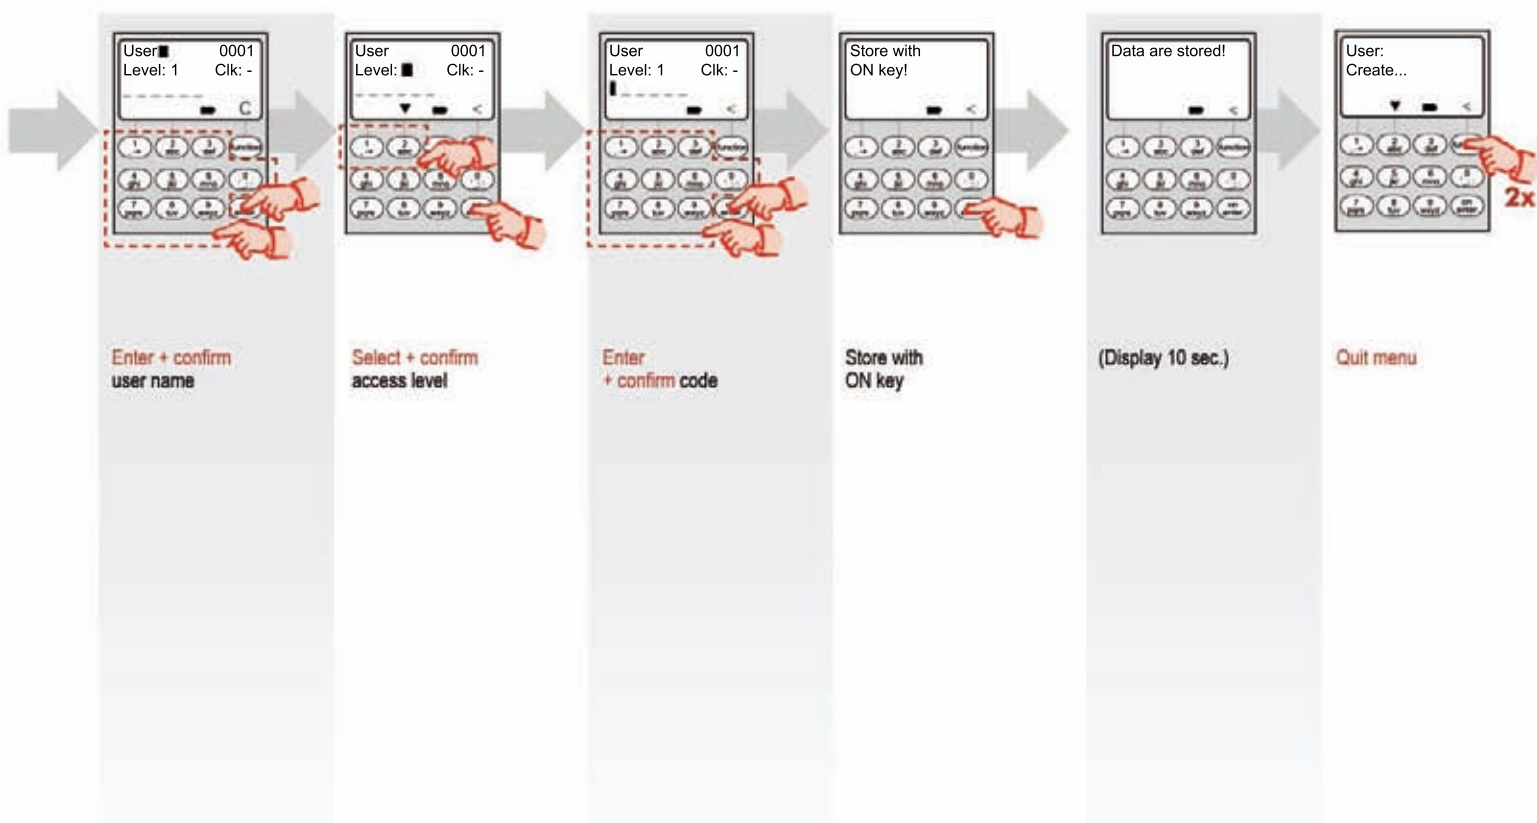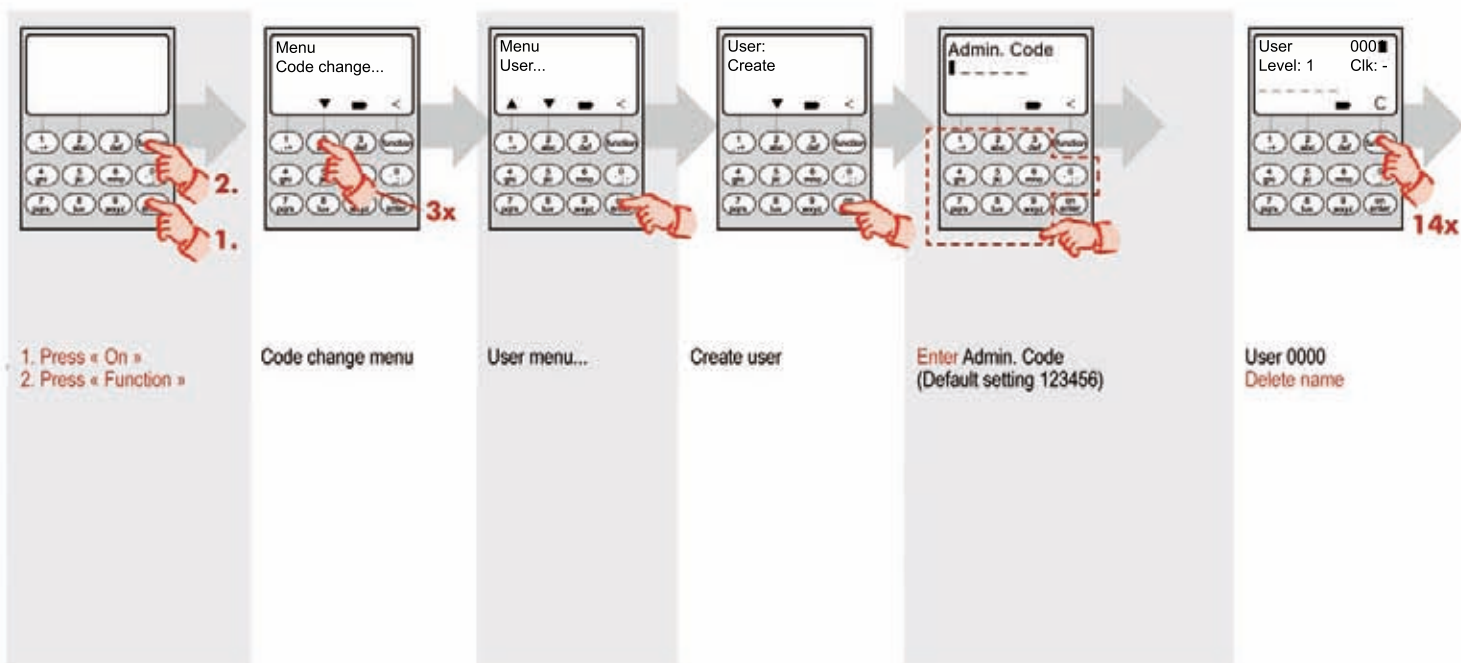




User: create, **modify**, display, delete

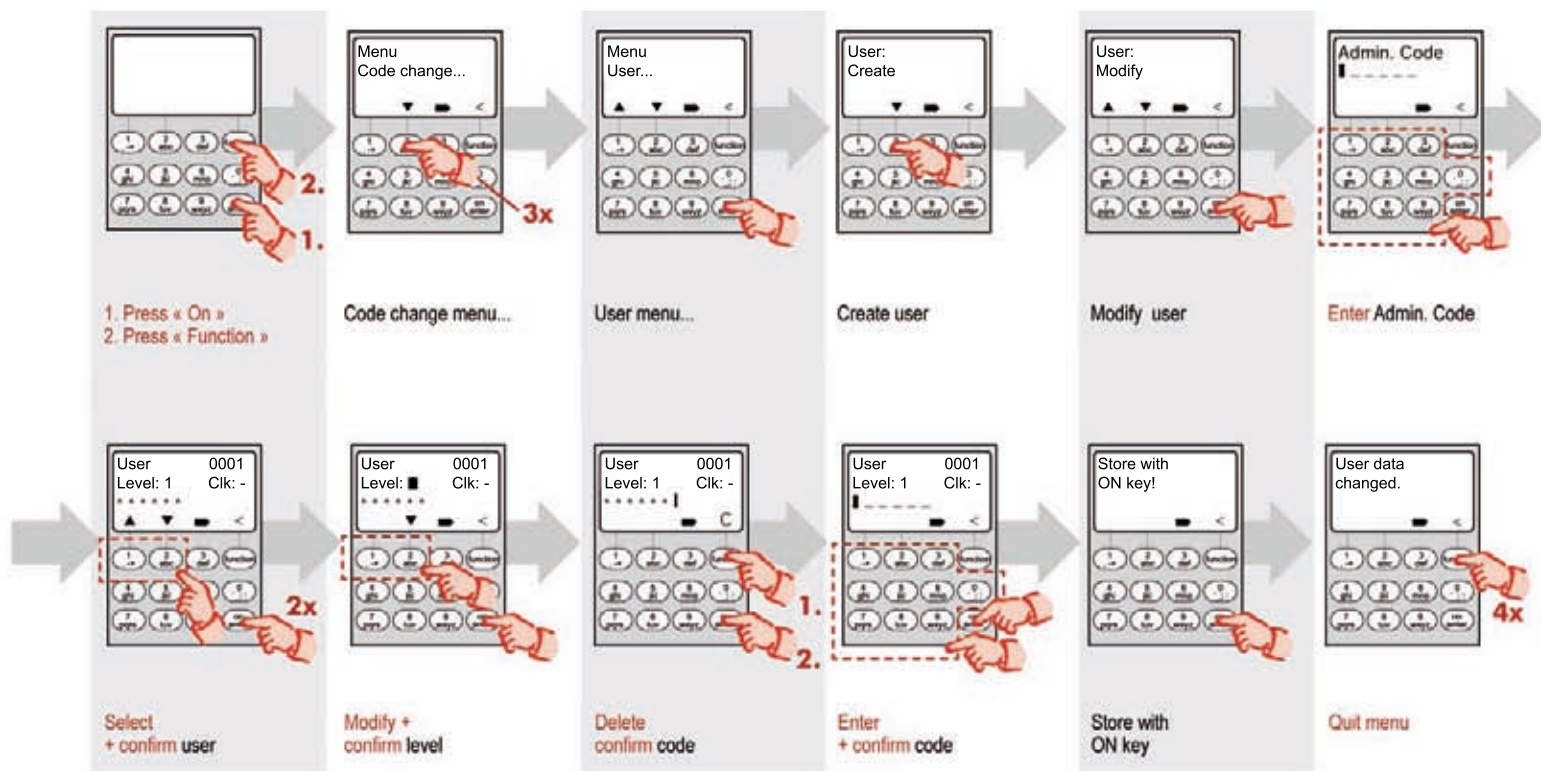


User: create, modify, **display**, delete

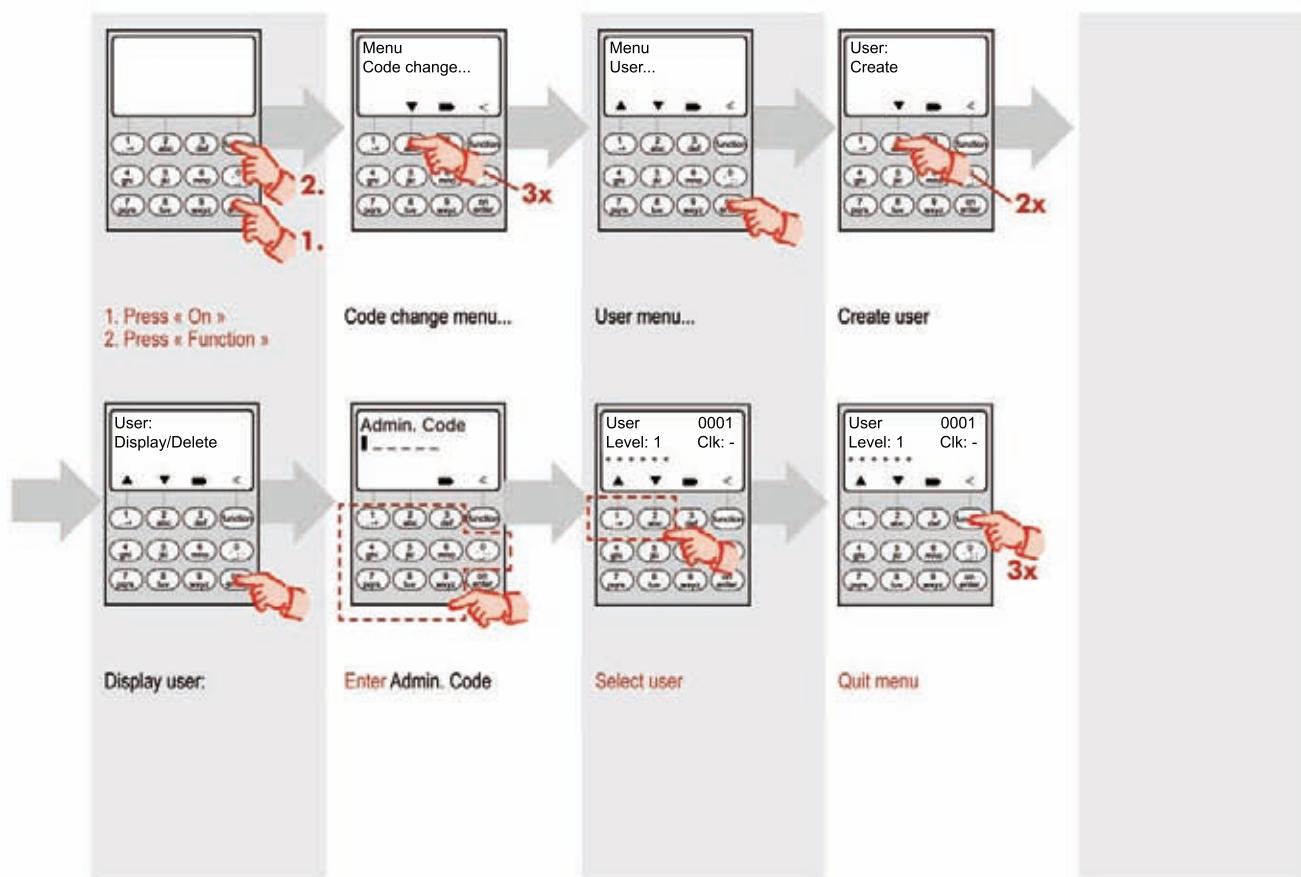




User: create, modify, display, delete

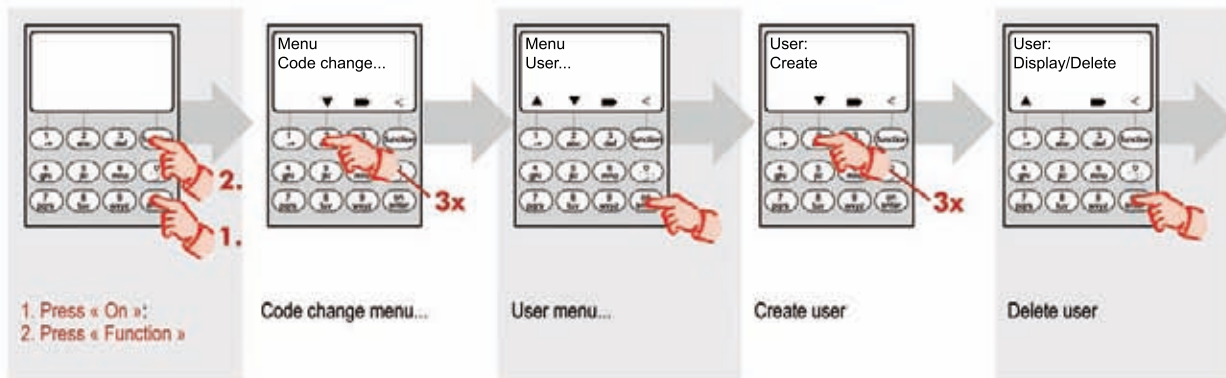


User: create, modify, display, delete

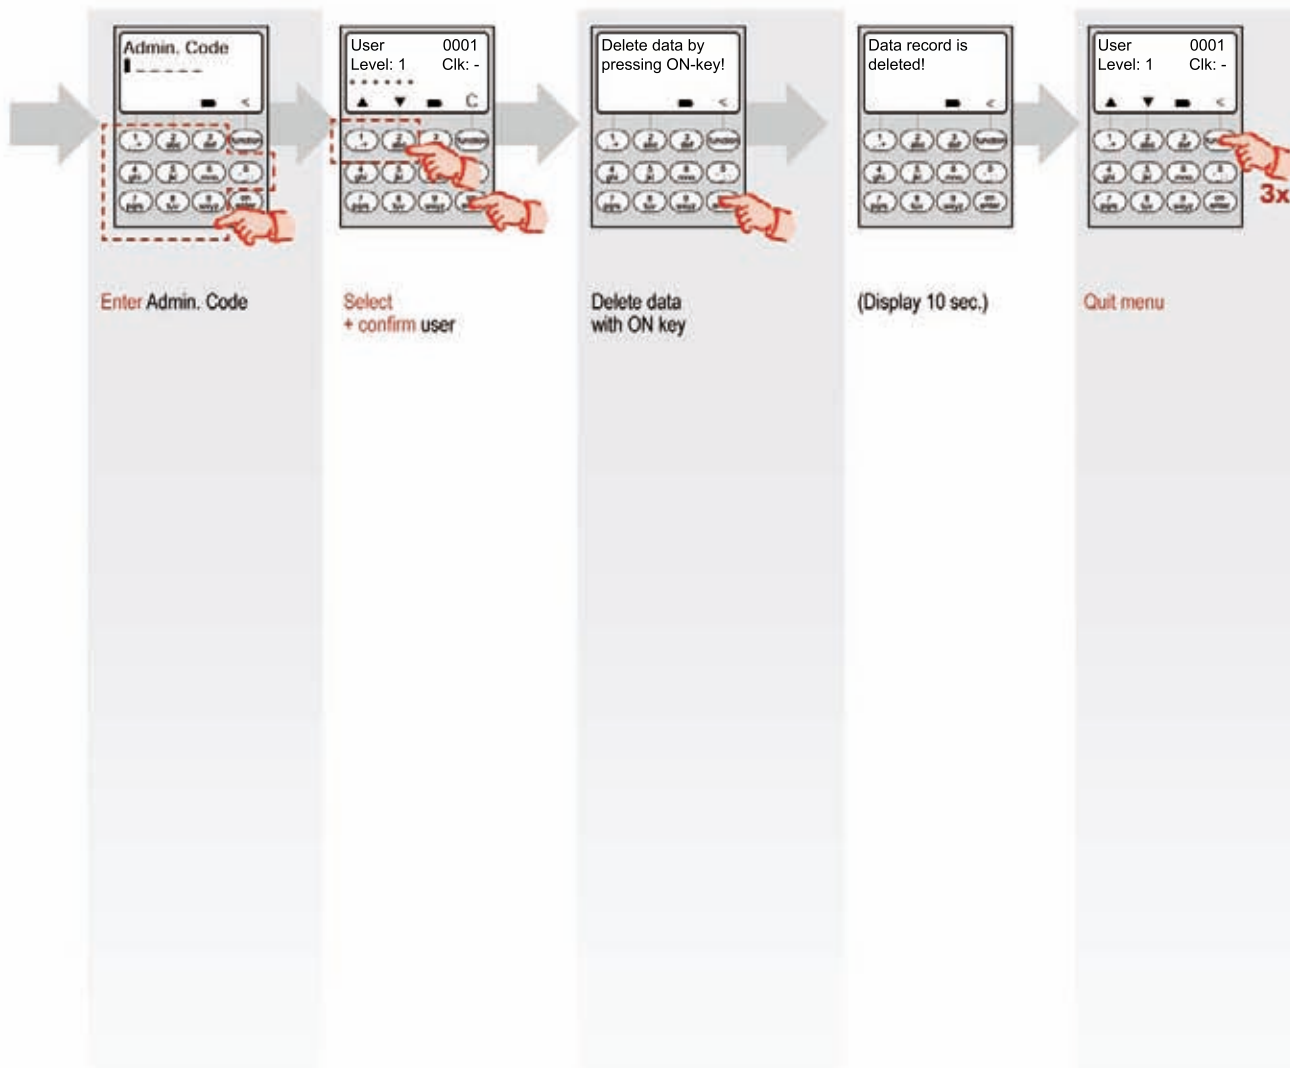



Administrator: Adjust code length


Codes already programmed must be adjusted when code length is changed (p. 19)

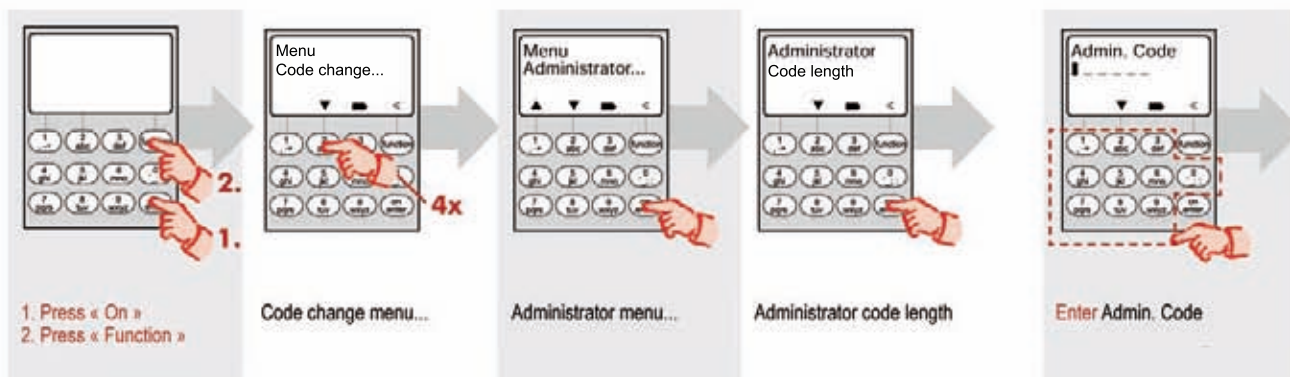

Administrator: Change code length


When changing from 6 to 8 digits, append 00:
When changing from 8 to 6 digits, leave out the last two digits:

123456 =>12345600
12345678 =>123456

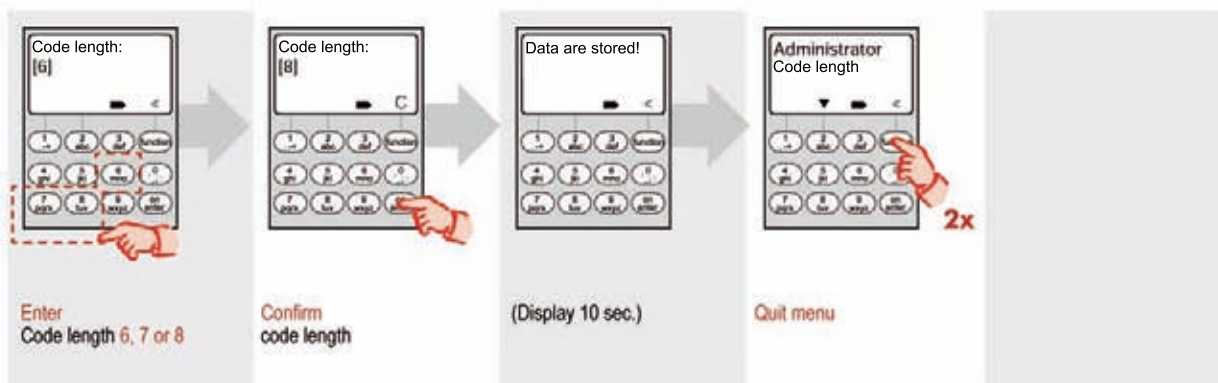

Administrator: restructure


Restructuring of database, function reserved for servicing.

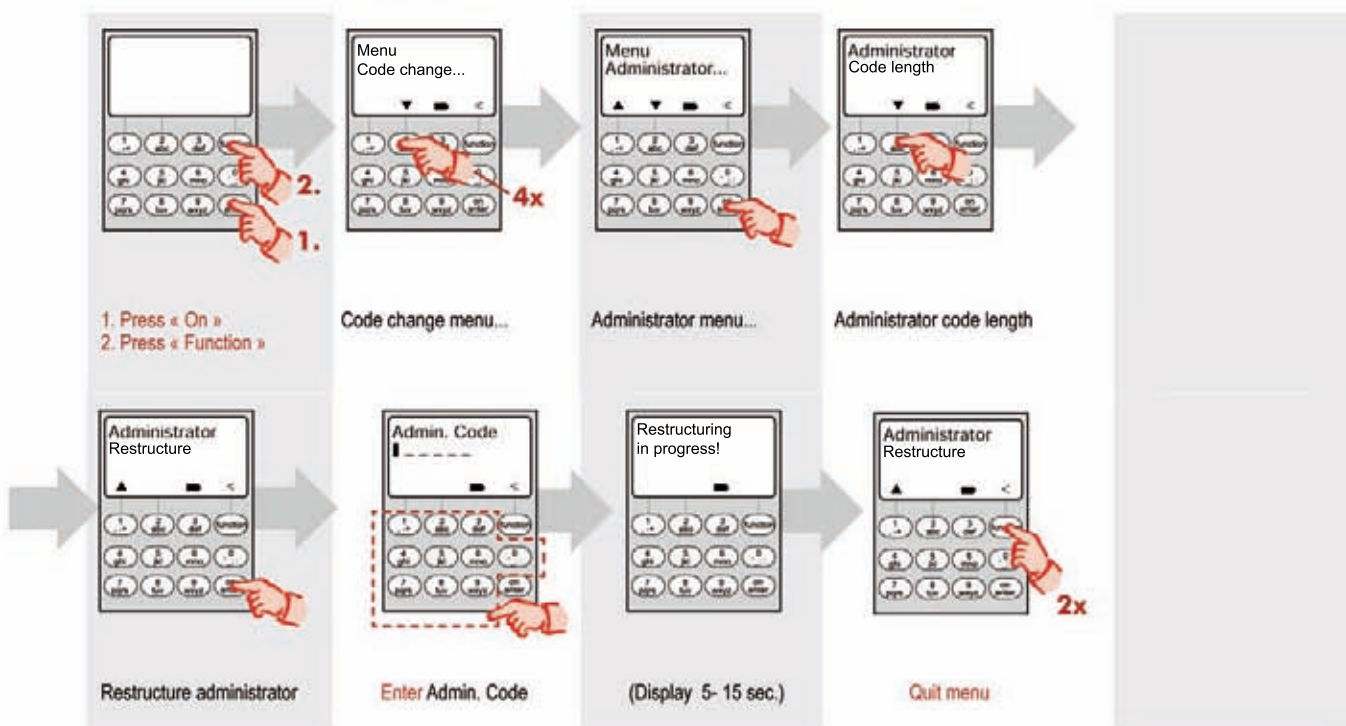




Display processes - Audit trail

The last approx. 1000 processes can be displayed.

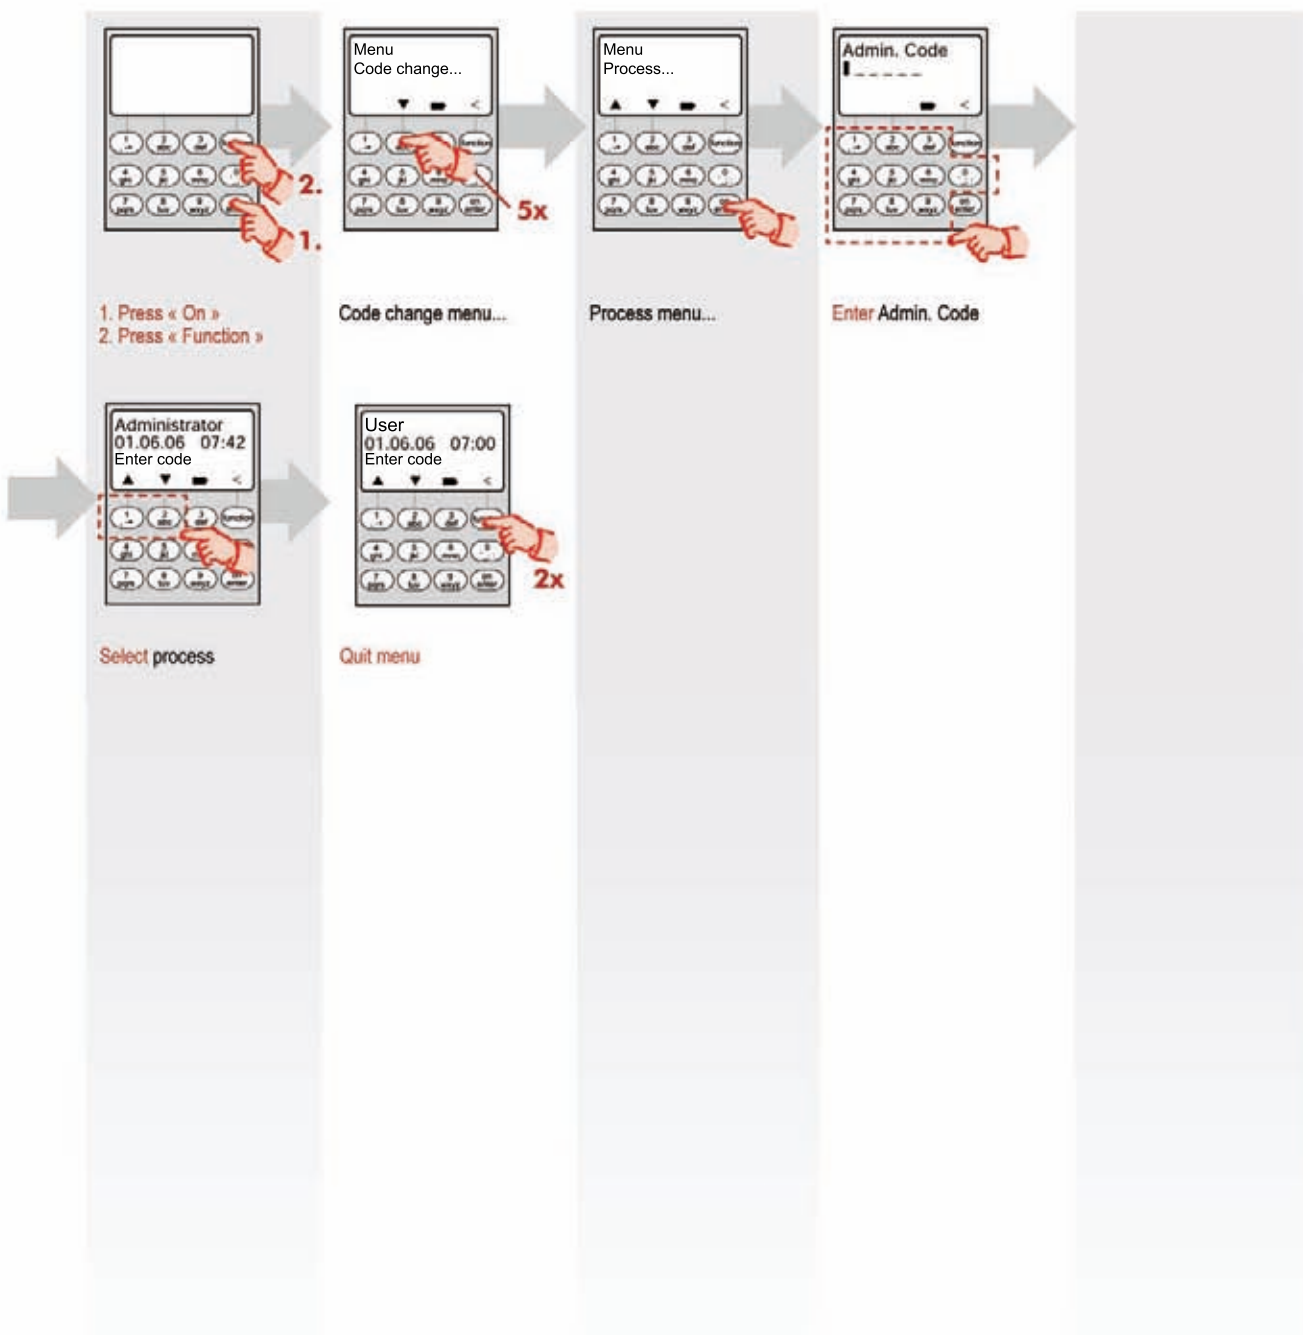



Display info

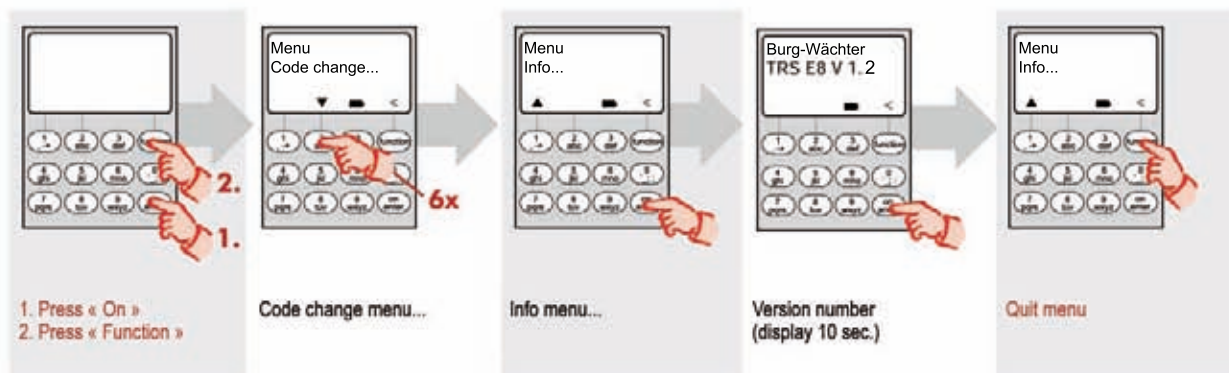

Battery replacement

Dispose batteries in an environmentally safe manner.



SecuTronic TRS E8





Technical data

Menu-controlled user handling

Maximum code number

TSE 3003 = 300, TRS E 8 = 5,

TRS E 8 : Electronic lock as per EN 1300 Class: B

Combination lock with 111.000.000 real possibilities.

Individual access level (1, 0, 1/2, 1/3, ADMIN)

6, 7, 8-digit code can be selected

Blocking time after 3 incorrect code entries:

TSE 3003: 1 min., thereafter 5 min.

TRS E8 : 5 min., thereafter 20 min.

Display in 12 languages

Process display available

Power supply: 3 MIGNON batteries LR6, AA alkaline

Optimal environmental conditions:

- 15°C / + 40°C / up to 95% relative humidity
(no condensation)

Permitted temperature range: - 20°C / + 50°C

When installed on external doors, the TSE 3003 should be protected from constant exposure to the elements (e.g. by a canopy).

The display of the TSE 3003 may respond slowly or become dark after an abrupt change of temperature.

Typographical errors, omissions and changes reserved.





Notes:



Notes:



Notes:



BA-TSE Premium / Secutronic - NM 05/04



BURG-WÄCHTER KG

Altenhofer Weg 15
D-58300 Wetter
Germany

www.burg-waechter.de
info@burg-waechter.de